



WEATHERCLAD™

A pre-decorated factory finished smooth faced weatherboard cladding that has been specially developed for high performance quick on-site installation.

- Each plank equivalent to 3 planks of weatherboard
- Resistant to climatic conditions
- Simple to install using hidden interlocking detail
- Install horizontally or vertically
- Resistant to impact
- Class '0'
- Density of panel will help improve acoustic performance of external wall

Applications

Ideal for use in new build or refurbishment situations and is suitable for use in residential, commercial or local authority applications.

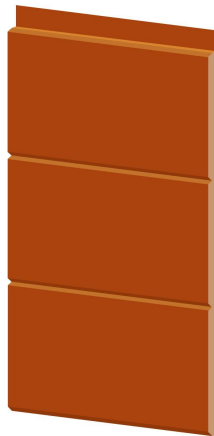

Email: info@euroform.co.uk
Telephone 01925 860999
Fax 01925 860066

ssue 15.2.06.Doc1.



Fixing Instructions

Ensure structure is straight and flat, steel or timber framing systems can be used which meet all relevant Building Regulations.

We advise screw fixing of the panel to support structure, these screws can be self drilling and self countersinking. Before fixing ensure panel is held flat and tight against the support structure, power screw drivers should have torque carefully set to ensure screw is countersunk to surface of panel so that the next section will slip over and ensure a tight fit, but do not over-tighten screw.

Support structures should be a minimum width of 50mm at nominal 600mm centres with a maximum of 650mm.

Panel Sizes

Length	2600mm
Width	508mm
Thickness	16mm
Weight	20kg/m ²

Cutting

Use either a hand saw or power saw with TCT blades, a fine tooth is advised to avoid damage to decorated surface. Safety glasses and approved dust mask should be worn when cutting panels.

Email: info@euroform.co.uk
Telephone 01925 860999
Fax 01925 860066

ssue 15.2.06.Doc1.

