SD Screws



Technical Data Sheet

PRODUCT

SD Screws are alkali resistant mechanical fasteners for fixing Cement Boards to light steel framing.

TECHNICAL INFORMATION

Base Material	Carbon Steel C-1022							
Coating Material	Ruspert 1000H							
Head Type	Big Wafer							
Torque (kg-cm)	46							
Hardened Depth (mm)	0.10 - 0.28							
Diameter (mm)	4.2							
Screw Drive	Phillips							
Thread	Fine							
Point	Drilling							
Surface Hardness (HV)	560							
Core Hardness (HV)	270 – 425							
Length (mm)	32							



STORAGE AND HANDLING

Store flat in a clean and dry environment. The use of protective gloves is recommended.


PACKAGING

500 pcs/box

PRODUCT CODE (K8)

10711059

PHYSICAL INFORMATION

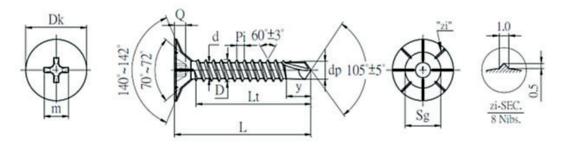

	Size	Dk		Sg	m		Q		Dri.	D		d		Pi.	dp	у	Wire Dia.	Torque (kg-cm)
3	Size	min	max	Ref	min	max	min	max	Dil.	min	max	min	max	±10%	±0.1	±0.5	+0.00	min
	ST4.2	10.11	11.00	6.40	4.90	5.15	2.80	3.10	2	4.04	4.22	2.95	3.10	1.40	3.35	4.80	3.30	46

Units: mm







IMPORTANT: The information provided within this document is believed correct and to the best of our available knowledge at its revision date and is provided as suggestion for safe handling, storage, transportation, use and disposal. The information should not be considered obligation in respect of warranty of (technical) performance, quality (specification) or suitability for any application or design. The customer must satisfy themself the product (or draft specification) are relevant and suitable for their need and design intent. Prospective users should test a sample of product under their own conditions to satisfy themselves of its suitability for intended purpose and that expert advice be sought where different applications are contemplated. Due to our policy of continuous improvement we reserve the right to alter or amend published specification or design without prior notice. Reproduction of any part of this publication in any manner is not permitted without our prior written consent.