

# Versarend fixings


(SH3 STS 5.0 x 42)

## Technical Data Sheet

High quality Stainless steel grade 304 St/St.

### DRIVE SYSTEM

Torx 25

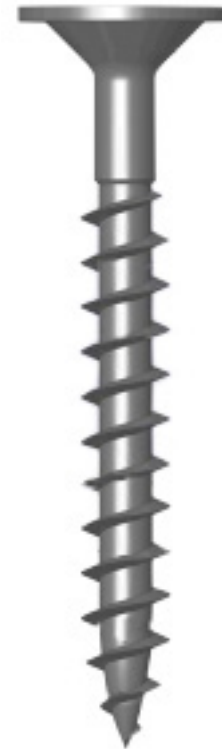


### ULTIMATE TENSILE STRENGTH (kN)




Fastner Dia.	5.0 x 42
(kN)	6.78

### ULTIMATE SHEAR STRENGTH (kN)



Fastner Dia.	5.0 x 42
(kN)	4.05

### TYPICAL ULTIMATE PULLOUT LOADS (N)



Material	Timber	Timber
Embedment	25mm	40mm
Ultimate Pullout (kN)	3.1kN	4.3kN

Figures based on laboratory test results with equipment conforming to BS 5427 on a random sample of fasteners manufactured to tolerance. Information supplied is for general guidance only and should not be considered performance data for a specific application.